

PIR Motion Sensor Switch

Model: SR-8004




Feature

- Detection range: $\leq 3\text{m}$.
- Power on when persons/objects come up the sensor switch area and power off when persons/objects moves away.
- DC12-36V version is also available
- Sense angle 60°


Parameter

Part No.	Input Voltage	Current	Output	Remarks
SR-8004-DC	12-36VDC	1x8A	1x(96-288)W	Detect human movement to turn on/off

Product Size

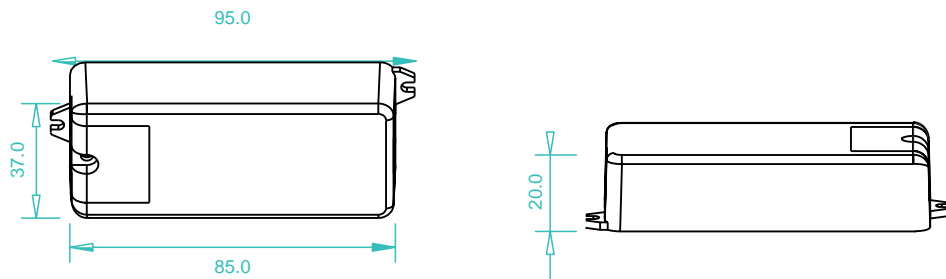

Wiring diagram

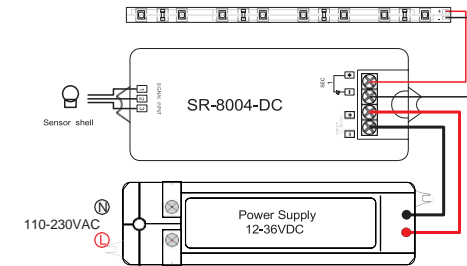

Safety & Warnings

- 1) The product shall be installed and serviced by a qualified person.
- 2) IP20. Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- 3) Always be sure to mount this unit in an area with proper ventilation to avoid overheating.
- 4) Please check if the output voltage of any LED power supplies used comply with the working voltage of the product.
- 5) Never connect any cables while power is on and always assure correct connections to avoid short circuits before switching on.
- 6) Please ensure that the cable is secured tightly in the connector
- 7) For update information please consult your supplier.