


SERIES CONVENTUS

Rounded aluminum profile for surface mounting

No matter where you decide to install it, the rounded shape of this series and its wide projection angle will enhance your decor by highlighting what is in its spectrum. The multiple options of colors, finishes, power, lenses and assembly make it a very versatile series. Fostering better heat dissipation, this series will provide you with uncompromising lighting for many years to come.



Description	mm	Inch
B - Width interior	16.90	0.6654
C - Width exterior	19.70	0.7756
D - Height	20.00	0.7874



FEATURES


- Rounded
- Modern
- Wide projection angle
- Can be cut according to your needs
- Allows continuous joint mounting
- Direct or indirect lighting
- Wide choice of lens
- Wide choice of colors and finishes
- Clear Anodized Aluminum 6063T5

APPLICATION

Regular (all purpose)

MOUNTING

Surface mount



PROJECTION

Direct




Indirect



POWER

Type	Lumen Meter	Feet	Watt Meter	Feet
Unique white	420	128	4.8	1.5
Unique white	500	152	4.8	1.5
Unique white	840	256	9.6	2.9
Unique white	1000	305	9.6	2.9
Unique white	700	213	12.0	3.7
Unique white	1100	335	12.0	3.7
Unique white	1400	427	14.0	4.3
Unique white	1200	366	14.4	4.4
Variable white	750	229	9.6	2.9
RGB			8.5	2.6
RGB			14.4	4.4

COLOR TEMPERATURE

Kelvin	Type
 2200K	 RGB
 2400K	
 2700K	 Variable white 2500K - 6000K
 3000K	
 3500K	
 4000K	
 5000K	
 5200K	
 6000K	
 6500K	


GRADATION

Type
Not dimmable
Dimmable Triac
Dimmable 0-10 Volt

DIFFUSER

Type	Light diffuse	Angle
Opalin	78 %	120 °
Frost	86 %	120 °
Clear	95 %	120 °

SHAPE

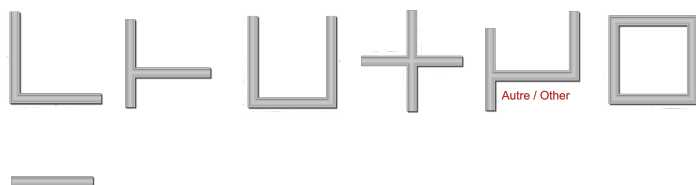

LUMINAIRE COLOR





Sale sheet

31-08-2021 09:52:19

DISCLAIMER

Due to our continued efforts to improve our documents and products, the specifications found on this document are subject to change without notice.