


SERIE TUBUS

Cylindrical aluminum profile for suspension or wall mounting

Whether you hang it or decide to mount it on the wall, the cylindrical shape of this series will give your decor a different and unrivaled look. The multiple options of colors, finishes, power, lenses and assembly make it a very versatile series. Fostering better heat dissipation, this serie will provide you with uncompromising lighting for many years to come.

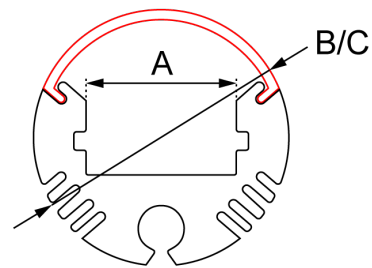


	mm	Inch
A -	12.2	1/2
B -	20.8	13/16



FEATURES

- Cylindrical
- Modern and stylish
- Can be cut according to your needs
- Allows continuous joint mounting
- Direct or indirect lighting
- Wide choice of lens
- Wide choice of colors and finishes
- Clear Anodized Aluminum 6063T5

MOUNTING



PROJECTION

Direct



Indirect






APPLICATION

Regular (all purpose)

POWER

Type	Lumen Meter	Feet	Watt Meter	Feet
Blanc unique	500	152	4.8	1.5
Blanc unique	840	256	9.6	2.9
Blanc unique	1000	305	9.6	2.9
Blanc unique	700	213	12.0	3.7
Blanc unique	1100	335	12.0	3.7
Blanc unique	1400	427	14.0	4.3
Blanc unique	1200	366	14.4	4.4
Blanc unique	1700	518	18.0	5.5
Blanc unique	1700	518	19.2	5.9
Blanc unique	1800	549	19.2	5.9
Blanc variable	750	229	9.6	2.9
Blanc variable	1500	457	19.2	5.9
RGB			8.5	2.6
RGB			14.4	4.4
RGB			17.0	5.2
RGB			20.0	6.1
RGB			20.0	6.1
RGBA			19.2	5.9
RGBA			19.2	5.9
RGBW			19.2	5.9

COLOR TEMPERATURE

Kelvin	Type
2200K	 RGB
2400K	
2700K	 RGB+ W
3000K	
3500K	 RGB+ W
4000K	
5000K	
5200K	 Variable white 2500K - 6000K 2700K - 6000K
6000K	
6500K	


GRADATION

Type
Not dimmable
Dimmable Triac
Dimmable 0-10 Volt

DIFFUSER

Type	Light diffuse	Angle
Opalin	78 %	120 °
Frosted	86 %	120 °

SHAPE

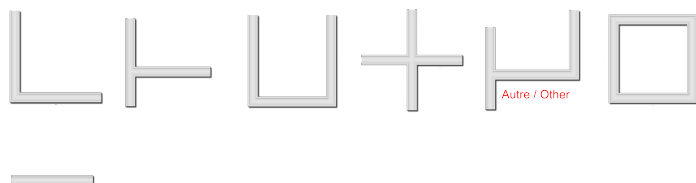

LUMINAIRE COLOR





Sale sheet

04-05-2022 12:21:10

DISCLAIMER

Due to our continued efforts to improve our documents and products, the specifications found on this document are subject to change without notice.