


## FLX-14.4-5050-24-RGBW

LED flexible strip

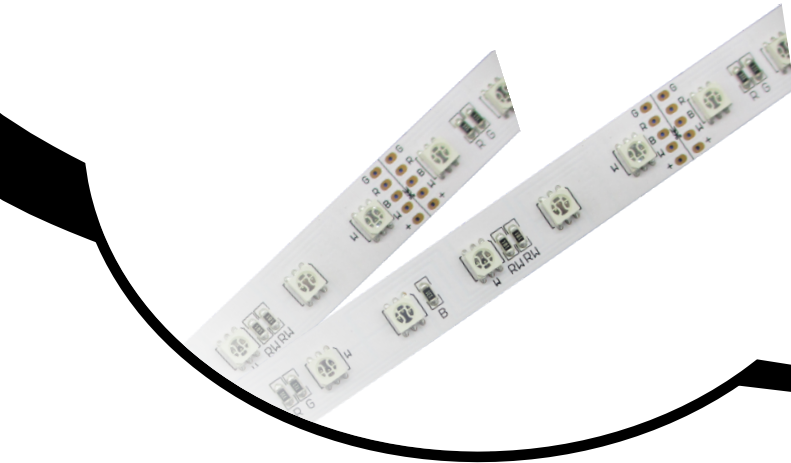

### FEATURES


- Various angles 120 °
- With self-adhesive tape on the back
- Made up of high quality LEDs
- Work voltage DC24V
- Cut every 100mm

### APPLICATIONS

- Car decoration
- Architectural decorative lighting
- Archway, ceiling, bridge edge lighting
- Auditorium walkway lighting
- Signage letters backlighting
- Channel letter lighting


### MECHANICAL SPECIFICATIONS

-Dimensions version 60DEL/m

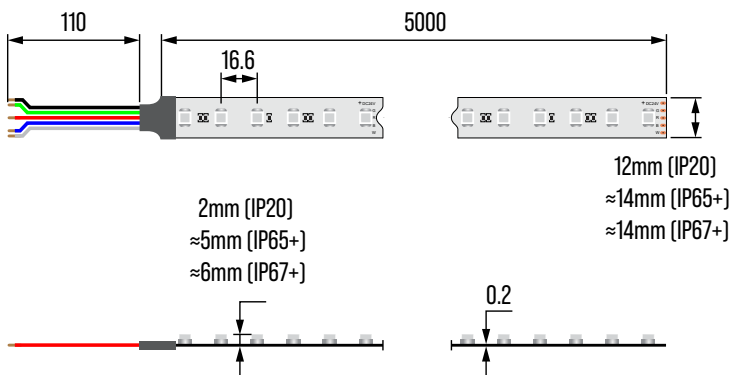

Unit: mm  
Cot: 100mm  
LED type: 5050 RGBW

-Connection diagram

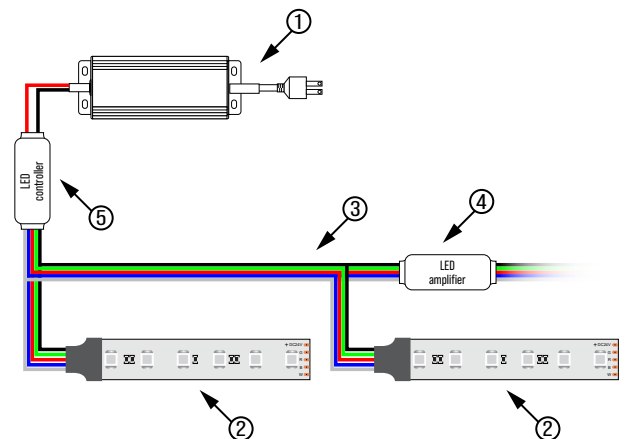

# TECHNICAL SPECIFICATIONS

## LED DIMENSIONS




SMD5050  
(5mm x 5mm)

## LED QTY



60DEL/m

## INCREMENT



Cut every  
100mm

## VOLTAGE



24 volt

## POWER



14.4W/m

## PCB WIDTH



12mm (IP20)  
≈14mm (IP65+)  
≈14mm (IP67+)

## COLOR



RGBW (red, green, blue, white)

R: 620-625nm / 75-78lm/m  
G: 515-520nm / 245-252lm/m  
B: 465-470nm / 55-60lm/m

White temperature color  
1800/3000/4500/6000K

## PROTECTION TYPE



IP20



IP67



IP65

## NOTICE

Before application, please make sure the power supply is in accordance to the strips.

## DISCLAIMER

Due to our continued efforts to improve our documents and products, the specifications found on this document are subject to change without notice.