

FLX-38.4-2-15MM-2216-24

LED flexible strip



FEATURES


- Various angles 120 °
- With self-adhesive tape on the back
- Made up of high quality LEDs
- Work voltage DC24V
- Cut every 12.7mm

APPLICATIONS

- Car decoration
- Architectural decorative lighting
- Archway, ceiling, bridge edge lighting
- Auditorium walkway lighting
- Signage letters backlighting
- Channel letter lighting


MECHANICAL SPECIFICATIONS

–Dimensions version 480DEL/m

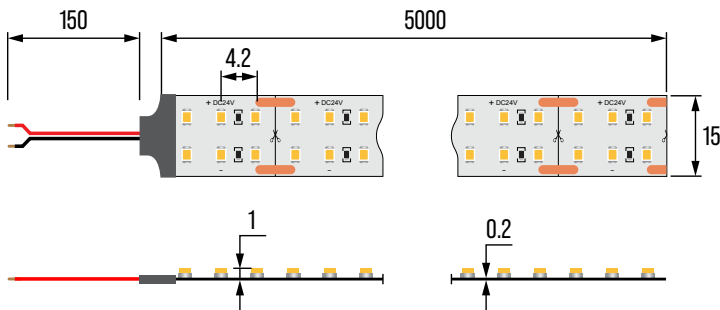






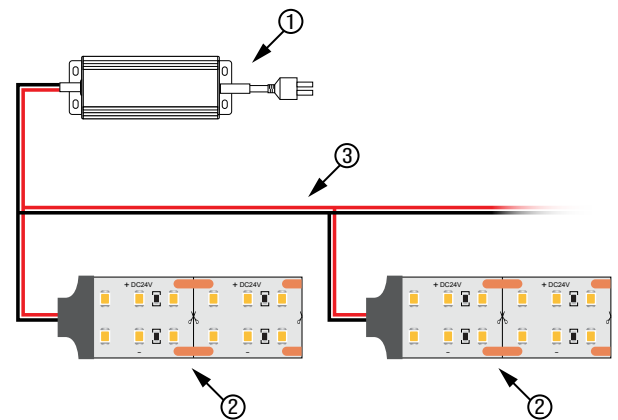

Unit: mm
Cut: 12.7mm

–Connection diagram



- ① Power supply (driver)
- ② LED strips
- ③ Wires

TECHNICAL SPECIFICATIONS

LED DIMENSIONS	LED QTY	INCREMENT	VOLTAGE
 SMD2216 (2.2mm x 1.6mm)	 480DEL/m dual line	 Cut every 12.7mm	 24 volt
POWER	PCB WIDTH	COLOR	PROTECTION TYPE
 38.4W/m	 15mm	Warm white: 1800/2200/2700/ 3000/ 3500K, 2700-2800lm/m Nature white: 4000-4500K, 2900-3000lm/m Pure white: 6500K, 3200-3400lm/m	 IP20

NOTICE

Before application, please make sure the power supply is in accordance to the strips.

DISCLAIMER

Due to our continued efforts to improve our documents and products, the specifications found on this document are subject to change without notice.