

## FLX-4.8-5MM-3528-24

LED flexible strip



### FEATURES


- Various angles 120 °
- With self-adhesive tape on the back
- Made up of high quality LEDs
- Work voltage DC24V
- Cut every 100mm

### APPLICATIONS

- Car decoration
- Architectural decorative lighting
- Archway, ceiling, bridge edge lighting
- Auditorium walkway lighting
- Signage letters backlighting
- Channel letter lighting


### MECHANICAL SPECIFICATIONS

-Dimensions version 60DEL/m

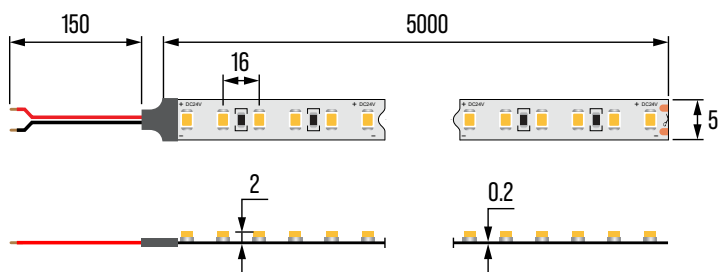

Unit: mm  
Cut: 100mm

-Connection diagram

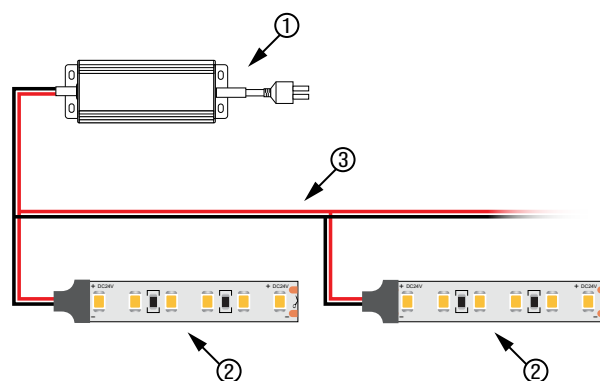

- ① Power supply (driver)
- ② LED strips
- ③ Wires

# TECHNICAL SPECIFICATIONS

## LED DIMENSIONS




SMD3528  
(3.5mm x 2.8mm)

## LED QTY



60DEL/m

## INCREMENT



Cut every  
100mm

## VOLTAGE



24 volt

## POWER



4.8W/m

## PCB WIDTH



5mm

## COLOR



Warm white:  
2700/3000K, 340-370lm/m

Nature white:  
4000-4500K, 370-400lm/m

Pure white:  
6000-6500K, 400-430lm/m

## PROTECTION TYPE



IP20

## NOTICE

Before application, please make sure the power supply is in accordance to the strips.

## DISCLAIMER

Due to our continued efforts to improve our documents and products, the specifications found on this document are subject to change without notice.